
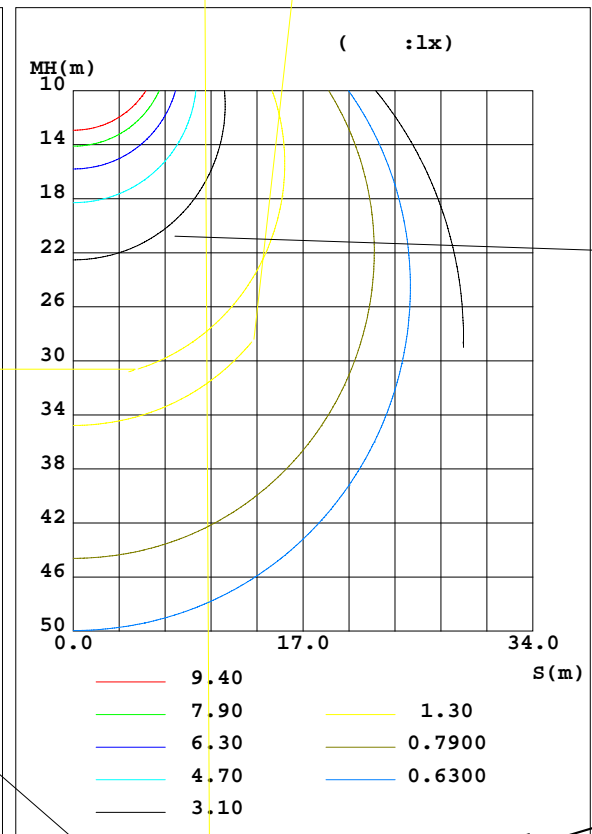


|   |                |               |  |
|---|----------------|---------------|--|
| : U:220.1V I:0.2231A P:47.38W PF:0.9650 |                | :5332.25x1 1m |  |
| : MZJ-LED140P-IP65                      | :LED 6000K     | :N/A          |  |
| :MZJ-LED140P-IP65                       | : 1230*82*63mm | :3            |  |
| :                                       | :1.084*0.082   | :N/A          |  |

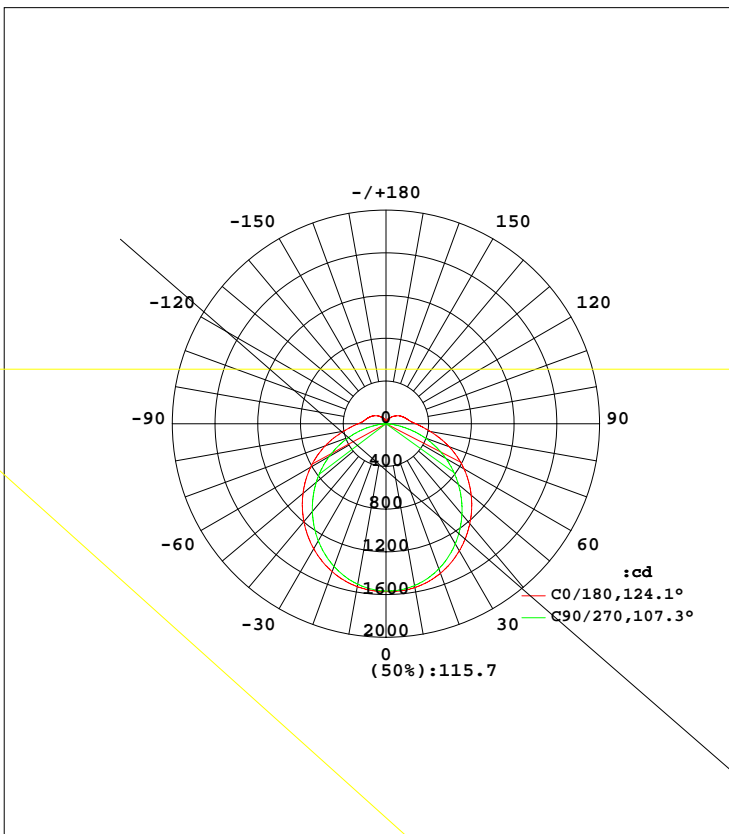

:

|     | C0    | C45   | C90   | C135  | C180  | C225  | C270  | C315  | (°)     |        |       | %lum, lamp |
|-----|-------|-------|-------|-------|-------|-------|-------|-------|---------|--------|-------|------------|
| 5   | 1566  | 1561  | 1555  | 1555  | 1571  | 1565  | 1561  | 1560  | 0- 5    | 37.42  | 37.42 | 0.70,0.70  |
| 10  | 1549  | 1540  | 1526  | 1533  | 1558  | 1546  | 1539  | 1544  | 5- 10   | 111.0  | 148.5 | 2.78,2.78  |
| 15  | 1518  | 1506  | 1482  | 1495  | 1530  | 1513  | 1500  | 1514  | 10- 15  | 180.9  | 329.3 | 6.18,6.18  |
| 20  | 1474  | 1458  | 1423  | 1444  | 1490  | 1466  | 1447  | 1470  | 15- 20  | 244.5  | 573.8 | 10.8,10.8  |
| 25  | 1419  | 1397  | 1350  | 1381  | 1437  | 1405  | 1378  | 1413  | 20- 25  | 299.6  | 873.4 | 16.4,16.4  |
| 30  | 1353  | 1326  | 1267  | 1308  | 1374  | 1334  | 1298  | 1345  | 25- 30  | 344.6  | 1218  | 22.8,22.8  |
| 35  | 1278  | 1246  | 1174  | 1225  | 1301  | 1252  | 1207  | 1266  | 30- 35  | 378.3  | 1596  | 29.9,29.9  |
| 40  | 1196  | 1157  | 1072  | 1134  | 1221  | 1162  | 1106  | 1179  | 35- 40  | 399.9  | 1996  | 37.4,37.4  |
| 45  | 1108  | 1062  | 964.9 | 1039  | 1134  | 1066  | 999.0 | 1085  | 40- 45  | 409.2  | 2405  | 45.1,45.1  |
| 50  | 1015  | 961.8 | 852.7 | 937.1 | 1042  | 963.6 | 886.0 | 985.3 | 45- 50  | 406.6  | 2812  | 52.7,52.7  |
| 55  | 917.1 | 857.9 | 735.0 | 831.4 | 944.4 | 857.1 | 767.3 | 881.2 | 50- 55  | 392.2  | 3204  | 60.1,60.1  |
| 60  | 815.6 | 750.5 | 614.7 | 722.5 | 843.1 | 746.6 | 645.3 | 773.3 | 55- 60  | 366.9  | 3571  | 67,67      |
| 65  | 711.3 | 640.4 | 492.2 | 611.0 | 737.8 | 633.5 | 520.0 | 662.4 | 60- 65  | 331.7  | 3903  | 73.2,73.2  |
| 70  | 604.7 | 528.8 | 367.9 | 497.7 | 629.7 | 518.1 | 391.9 | 549.6 | 65- 70  | 287.8  | 4191  | 78.6,78.6  |
| 75  | 500.1 | 417.8 | 245.6 | 383.2 | 522.8 | 403.6 | 260.6 | 437.1 | 70- 75  | 237.0  | 4428  | 83,83      |
| 80  | 402.9 | 311.5 | 129.7 | 269.1 | 423.0 | 295.5 | 136.5 | 329.2 | 75- 80  | 182.3  | 4610  | 86.5,86.5  |
| 85  | 323.2 | 221.2 | 35.43 | 187.8 | 340.8 | 216.6 | 38.31 | 236.7 | 80- 85  | 130.8  | 4741  | 88.9,88.9  |
| 90  | 262.5 | 163.8 | 1.164 | 150.7 | 279.1 | 166.3 | 1.138 | 176.0 | 85- 90  | 94.00  | 4835  | 90.7,90.7  |
| 95  | 222.4 | 134.0 | 1.485 | 139.3 | 237.1 | 141.3 | 1.958 | 143.4 | 90- 95  | 75.39  | 4910  | 92.1,92.1  |
| 100 | 201.3 | 123.5 | 1.946 | 129.0 | 212.9 | 129.0 | 2.138 | 129.9 | 95-100  | 65.97  | 4976  | 93.3,93.3  |
| 105 | 186.8 | 115.8 | 2.343 | 118.5 | 195.1 | 118.3 | 2.504 | 117.9 | 100-105 | 59.72  | 5036  | 94.4,94.4  |
| 110 | 172.8 | 107.1 | 2.845 | 108.5 | 179.1 | 108.6 | 2.821 | 109.4 | 105-110 | 53.86  | 5090  | 95.4,95.4  |
| 115 | 159.7 | 96.48 | 3.385 | 99.14 | 163.8 | 100.2 | 3.329 | 101.2 | 110-115 | 48.16  | 5138  | 96.4,96.4  |
| 120 | 145.8 | 80.73 | 3.946 | 90.10 | 148.9 | 91.18 | 3.853 | 87.37 | 115-120 | 41.74  | 5179  | 97.1,97.1  |
| 125 | 131.9 | 68.07 | 4.507 | 81.05 | 131.5 | 81.98 | 4.398 | 72.45 | 120-125 | 35.51  | 5215  | 97.8,97.8  |
| 130 | 118.2 | 57.67 | 5.004 | 68.87 | 114.5 | 73.04 | 4.911 | 62.09 | 125-130 | 29.36  | 5244  | 98.4,98.4  |
| 135 | 104.6 | 48.40 | 5.469 | 62.77 | 99.72 | 64.22 | 5.413 | 53.03 | 130-135 | 23.94  | 5268  | 98.8,98.8  |
| 140 | 91.19 | 39.62 | 5.951 | 54.57 | 84.41 | 54.50 | 5.938 | 45.26 | 135-140 | 19.15  | 5287  | 99.2,99.2  |
| 145 | 77.94 | 32.53 | 6.390 | 46.38 | 72.57 | 45.87 | 6.445 | 37.62 | 140-145 | 14.62  | 5302  | 99.4,99.4  |
| 150 | 64.86 | 26.85 | 6.787 | 38.17 | 62.50 | 37.53 | 6.847 | 31.00 | 145-150 | 11.08  | 5313  | 99.6,99.6  |
| 155 | 51.95 | 23.15 | 7.136 | 30.10 | 50.25 | 29.75 | 7.201 | 24.99 | 150-155 | 7.899  | 5321  | 99.8,99.8  |
| 160 | 39.39 | 19.73 | 7.444 | 22.65 | 38.96 | 22.01 | 7.519 | 20.86 | 155-160 | 5.303  | 5326  | 99.9,99.9  |
| 165 | 27.98 | 16.37 | 7.713 | 16.03 | 27.40 | 15.41 | 7.810 | 16.72 | 160-165 | 3.250  | 5330  | 99.9,99.9  |
| 170 | 17.81 | 12.64 | 7.904 | 10.75 | 16.22 | 10.52 | 8.032 | 12.71 | 165-170 | 1.726  | 5331  | 100,100    |
| 175 | 8.985 | 9.434 | 8.115 | 8.067 | 9.336 | 8.124 | 8.185 | 9.554 | 170-175 | 0.7433 | 5332  | 100,100    |
| 180 | 7.894 | 8.037 | 8.312 | 8.074 | 7.888 | 8.005 | 8.291 | 8.074 | 175-180 | 0.1994 | 5332  | 100,100    |
| :°  | :cd   |       |       |       |       |       |       |       |         | :lm    |       |            |

(90 ) : 2405.4 lm


%lum = 45.1%  
 %lamp = 45.1%

(120 ) : 3571.1 lm

%lum = 67.0%  
 %lamp = 67.0%

C : 0 - 360 : 0 - 180  
 C : 45.0 : 0.5  
 : (EVERFINE) GO-2000B\_V1 V2.0.351  
 :25.3 :65.0%  
 : :9.490 [K=1.0000]  
 :2019-12-28 :

|   |  |                |      |
|---|--|----------------|------|
| : U:220.1V I:0.2231A P:47.38W PF:0.9650 |  | :5332.25x1 lm  |      |
| : MZJ-LED140P-IP65                      |  | :LED 6000K     | :N/A |
| :MZJ-LED140P-IP65                       |  | : 1230*82*63mm | : 3  |
| :                                       |  | :1.084*0.082   | :N/A |

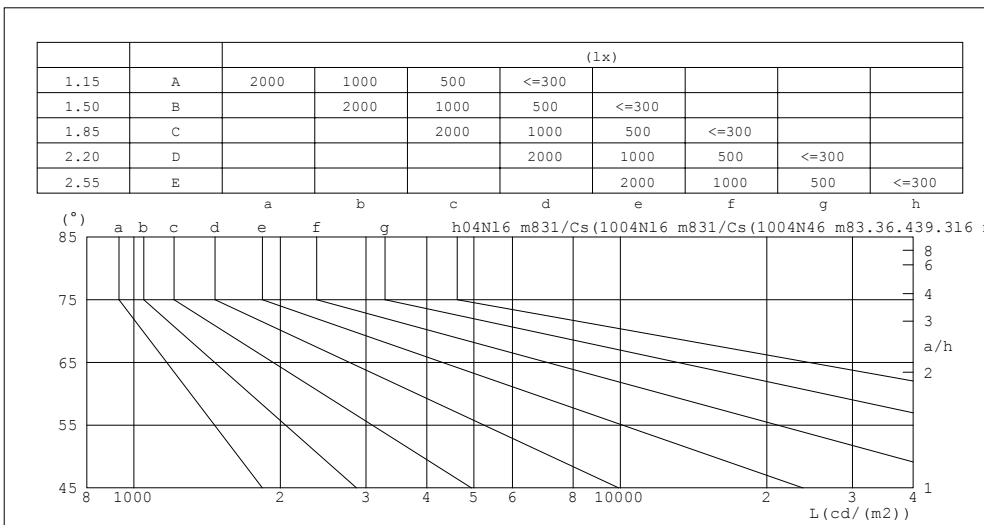

|   |                |               |  |
|---|----------------|---------------|--|
| : U:220.1V I:0.2231A P:47.38W PF:0.9650 |                | :5332.25x1 lm |  |
| : MZJ-LED140P-IP65                      | :LED 6000K     | :N/A          |  |
| :MZJ-LED140P-IP65                       | : 1230*82*63mm | :3            |  |
| :                                       | :1.084*0.082   | :N/A          |  |

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|



UGR(Unified Glare Rating)

|   |  |                |      |
|---|--|----------------|------|
| : U:220.1V I:0.2231A P:47.38W PF:0.9650 |  | :5332.25x1 lm  |      |
| : MZJ-LED140P-IP65                      |  | :LED 6000K     | :N/A |
| :MZJ-LED140P-IP65                       |  | : 1230*82*63mm | :3   |
| :                                       |  | :1.084*0.082   | :N/A |

|               |                    |      |      |      |      |                  |      |      |      |      |
|---------------|--------------------|------|------|------|------|------------------|------|------|------|------|
| :             | 0.7                | 0.7  | 0.5  | 0.5  | 0.3  | 0.7              | 0.7  | 0.5  | 0.5  | 0.3  |
|               | 0.5                | 0.3  | 0.5  | 0.3  | 0.3  | 0.5              | 0.3  | 0.5  | 0.3  | 0.3  |
|               | 0.2                | 0.2  | 0.2  | 0.2  | 0.2  | 0.2              | 0.2  | 0.2  | 0.2  | 0.2  |
|               | (Viewed crosswise) |      |      |      |      | (Viewed endwise) |      |      |      |      |
| x = 2H y = 2H | 22.5               | 23.9 | 22.9 | 24.3 | 24.6 | 21.5             | 22.9 | 21.9 | 23.3 | 23.7 |
| 3H            | 24.5               | 25.8 | 24.9 | 26.2 | 26.6 | 22.9             | 24.2 | 23.4 | 24.6 | 25.1 |
| 4H            | 25.5               | 26.7 | 25.9 | 27.1 | 27.6 | 23.5             | 24.7 | 23.9 | 25.1 | 25.6 |
| 6H            | 26.5               | 27.7 | 27.0 | 28.1 | 28.6 | 23.8             | 25.0 | 24.3 | 25.4 | 25.9 |
| 8H            | 27.0               | 28.2 | 27.5 | 28.6 | 29.1 | 23.9             | 25.0 | 24.3 | 25.4 | 25.9 |
| 12H           | 27.6               | 28.7 | 28.1 | 29.2 | 29.7 | 23.9             | 24.9 | 24.3 | 25.4 | 25.9 |
| 4H 2H         | 23.0               | 24.3 | 23.5 | 24.7 | 25.2 | 22.3             | 23.6 | 22.8 | 24.0 | 24.4 |
| 3H            | 25.2               | 26.3 | 25.7 | 26.8 | 27.3 | 24.0             | 25.1 | 24.5 | 25.5 | 26.0 |
| 4H            | 26.4               | 27.4 | 26.9 | 27.9 | 28.4 | 24.7             | 25.7 | 25.2 | 26.2 | 26.7 |
| 6H            | 27.6               | 28.5 | 28.1 | 29.0 | 29.6 | 25.2             | 26.1 | 25.7 | 26.6 | 27.1 |
| 8H            | 28.2               | 29.1 | 28.8 | 29.6 | 30.2 | 25.3             | 26.1 | 25.8 | 26.6 | 27.2 |
| 12H           | 29.0               | 29.7 | 29.5 | 30.3 | 30.9 | 25.3             | 26.1 | 25.9 | 26.7 | 27.3 |
| 8H 4H         | 26.7               | 27.5 | 27.2 | 28.1 | 28.6 | 25.2             | 26.1 | 25.8 | 26.6 | 27.2 |
| 6H            | 28.1               | 28.8 | 28.7 | 29.4 | 30.0 | 26.0             | 26.7 | 26.6 | 27.2 | 27.9 |
| 8H            | 28.9               | 29.5 | 29.5 | 30.1 | 30.8 | 26.2             | 26.9 | 26.8 | 27.4 | 28.1 |
| 12H           | 29.9               | 30.4 | 30.5 | 31.0 | 31.7 | 26.4             | 27.0 | 27.0 | 27.6 | 28.2 |
| 12H 4H        | 26.7               | 27.5 | 27.3 | 28.0 | 28.6 | 25.4             | 26.1 | 25.9 | 26.7 | 27.3 |
| 6H            | 28.2               | 28.8 | 28.8 | 29.4 | 30.1 | 26.2             | 26.8 | 26.8 | 27.4 | 28.1 |
| 8H            | 29.1               | 29.6 | 29.7 | 30.2 | 30.9 | 26.6             | 27.1 | 27.2 | 27.7 | 28.4 |
| UGR :         |                    |      |      |      |      |                  |      |      |      |      |
| S = 1.0H      | + 0.1 / - 0.1      |      |      |      |      | + 0.1 / - 0.2    |      |      |      |      |
| 1.5H          | + 0.2 / - 0.3      |      |      |      |      | + 0.2 / - 0.3    |      |      |      |      |
| 2.0H          | + 0.2 / - 0.3      |      |      |      |      | + 0.2 / - 0.5    |      |      |      |      |

CIE Pub.117 , 53321m (81log(F/F0) = 5.8) .

C : 0 - 360 : 0 - 180  
 C : 45.0 : 0.5  
 : (EVERFINE) GO-2000B\_V1 V2.0.351  
 :25.3 :65.0%  
 : :9.490 [K=1.0000]  
 :2019-12-28 :


UF

|   |                |               |  |
|---|----------------|---------------|--|
| : U:220.1V I:0.2231A P:47.38W PF:0.9650 |                | :5332.25x1 lm |  |
| : MZJ-LED140P-IP65                      | :LED 6000K     | :N/A          |  |
| :MZJ-LED140P-IP65                       | : 1230*82*63mm | :3            |  |
| :                                       | :1.084*0.082   | :N/A          |  |

| / REFLECTANCE       |   |     |     |     |     |     |     |     |     |               |
|---------------------|---|-----|-----|-----|-----|-----|-----|-----|-----|---------------|
|                     | 0.8                                     | 0.8 | 0.8 | 0.7 | 0.7 | 0.7 | 0.5 | 0.5 | 0.5 | 0             |
|                     | 0.7                                     | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0.7 | 0.5 | 0.3 | 0             |
|                     | 0.2                                     | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0.2 | 0             |
|                     | UTILIZATION FACTORS (%) k(RI) x RCR = 5 |     |     |     |     |     |     |     |     |               |
| k = 0.60            | 53                                      | 41  | 34  | 52  | 41  | 34  | 51  | 40  | 34  | 27            |
| 0.80                | 63                                      | 51  | 43  | 61  | 50  | 43  | 59  | 49  | 42  | 35            |
| 1.00                | 71                                      | 59  | 51  | 69  | 58  | 51  | 66  | 59  | 50  | 42            |
| 1.25                | 78                                      | 66  | 59  | 76  | 65  | 58  | 72  | 63  | 57  | 48            |
| 1.50                | 83                                      | 72  | 64  | 81  | 71  | 63  | 77  | 68  | 62  | 53            |
| 2.00                | 90                                      | 80  | 73  | 87  | 79  | 72  | 83  | 75  | 70  | 60            |
| 2.50                | 94                                      | 85  | 78  | 91  | 83  | 77  | 86  | 80  | 74  | 64            |
| 3.00                | 98                                      | 90  | 83  | 95  | 87  | 82  | 89  | 83  | 79  | 68            |
| 4.00                | 102                                     | 95  | 90  | 99  | 93  | 88  | 93  | 88  | 84  | 72            |
| 5.00                | 105                                     | 99  | 94  | 101 | 96  | 92  | 95  | 91  | 87  | 75            |
| ROOM INDEX          | UF ( )                                  |     |     |     |     |     |     |     |     | UF ( )        |
| DIN EN 13032-2 2004 |   |     |     |     |     |     |     |     |     | SHRNOM = 1.25 |


C : 0 - 360 : 0 - 180  
 C : 45.0 : 0.5  
 : : (EVERFINE) GO-2000B\_V1 V2.0.351  
 :25.3 :65.0%  
 : :9.490 [K=1.0000]  
 :2019-12-28 :

|   |                |               |  |
|---|----------------|---------------|--|
| : U:220.1V I:0.2231A P:47.38W PF:0.9650 |                | :5332.25x1 lm |  |
| : MZJ-LED140P-IP65                      | :LED 6000K     | :N/A          |  |
| :MZJ-LED140P-IP65                       | : 1230*82*63mm | :3            |  |
| :                                       | :1.084*0.082   | :N/A          |  |

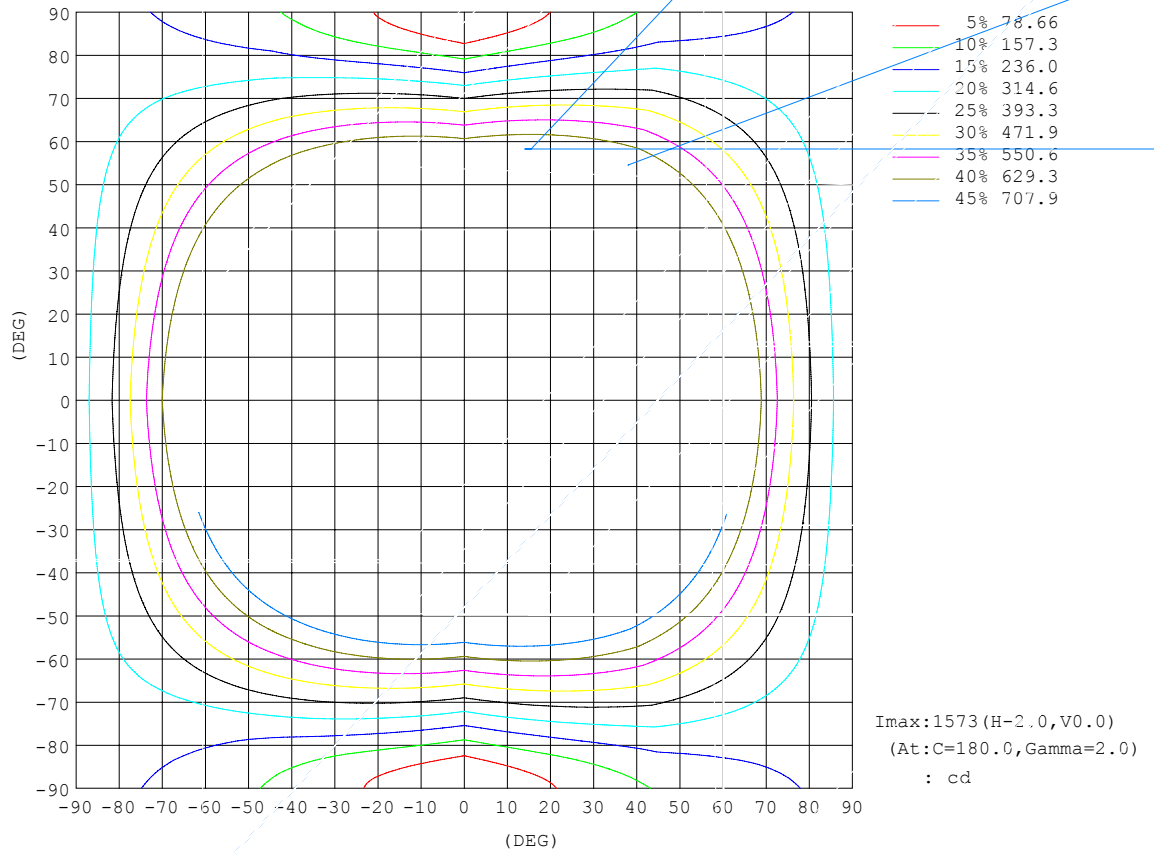




|   |                |               |
|---|----------------|---------------|
| : U:220.1V I:0.2231A P:47.38W PF:0.9650 |                | :5332.25x1 lm |
| : MZJ-LED140P-IP65                      | :LED 6000K     | :N/A          |
| :MZJ-LED140P-IP65                       | : 1230*82*63mm | : 3           |
| :                                       | :1.084*0.082   | :N/A          |

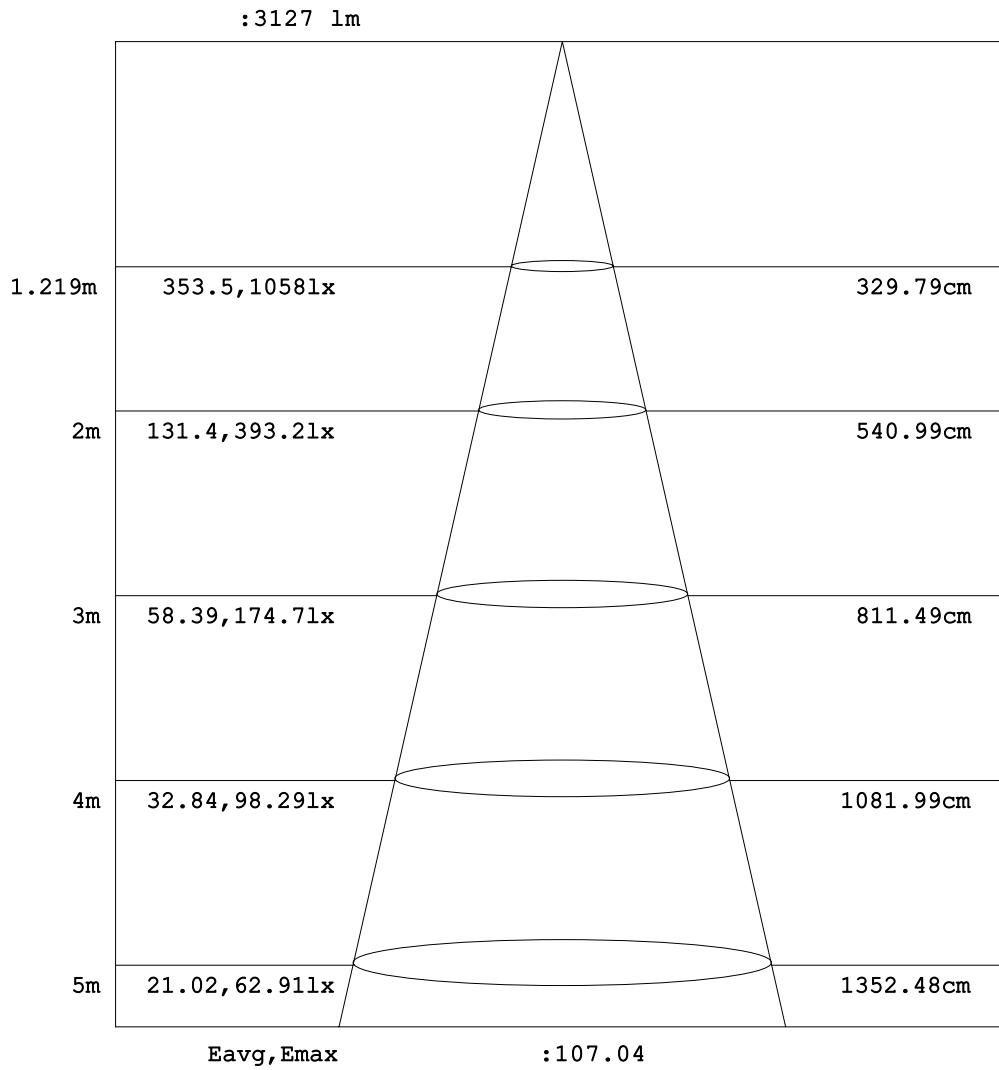

|   |             |                   |                                 |
|---|-------------|-------------------|---------------------------------|
| C | : 0 - 360   | : 0 - 180         |                                 |
| C | : 45.0      | : 0.5             |                                 |
|   | :           | :                 | (EVERFINE) GO-2000B_V1 V2.0.351 |
|   | :25.3       | :65.0%            |                                 |
|   | :           | :9.490 [K=1.0000] |                                 |
|   | :2019-12-28 | :                 |                                 |

|   |                |               |
|---|----------------|---------------|
| : U:220.1V I:0.2231A P:47.38W PF:0.9650 |                | :5332.25x1 1m |
| : MZJ-LED140P-IP65                      | :LED 6000K     | :N/A          |
| :MZJ-LED140P-IP65                       | : 1230*82*63mm | :3            |
| :                                       | :1.084*0.082   | :N/A          |

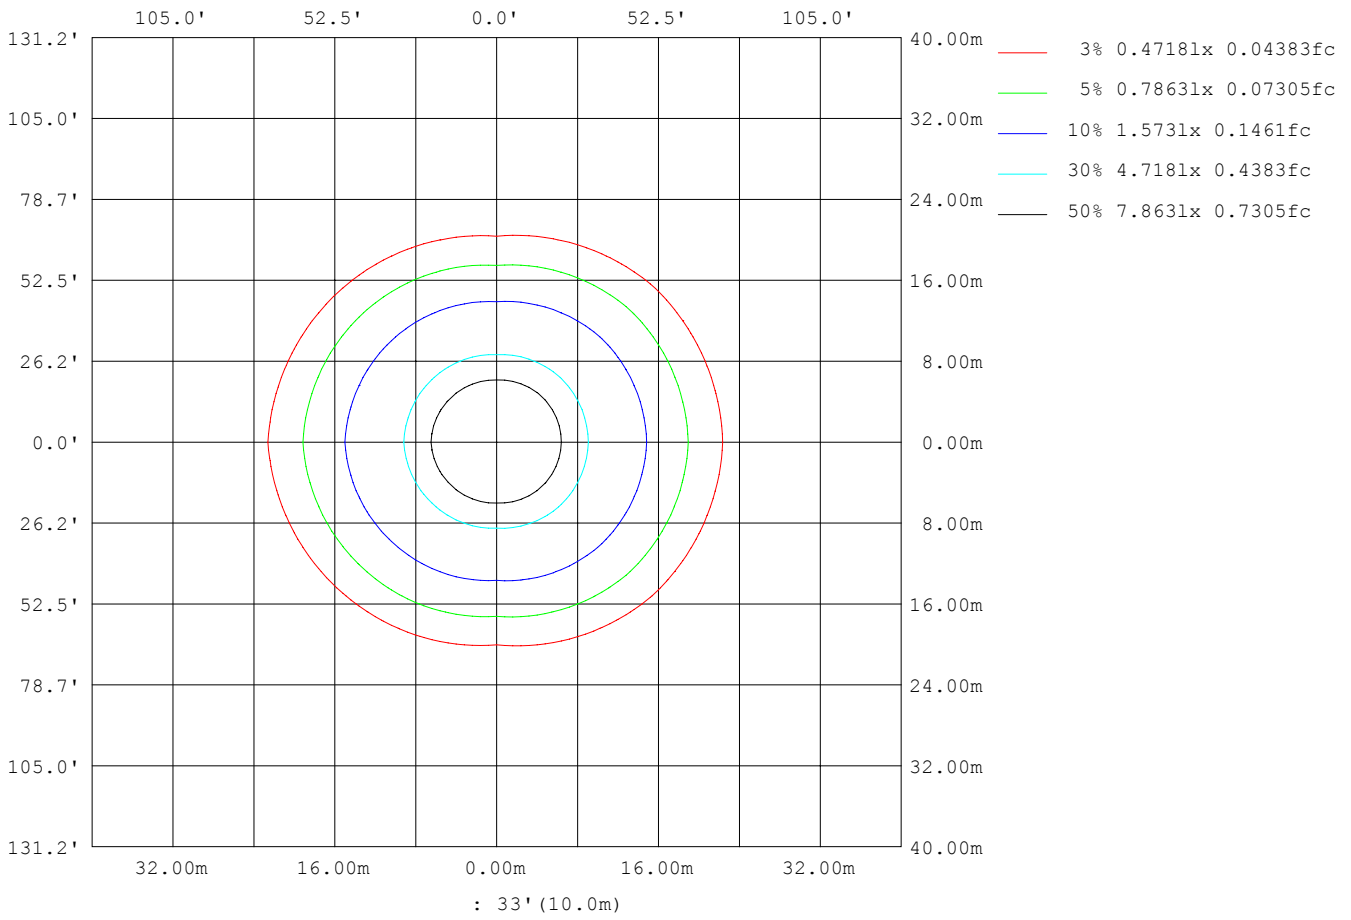

|   |             |                   |                                 |
|---|-------------|-------------------|---------------------------------|
| C | : 0 - 360   | : 0 - 180         |                                 |
| C | : 45.0      | : 0.5             |                                 |
|   | :           | :                 | (EVERFINE) GO-2000B_V1 V2.0.351 |
|   | :25.3       | :65.0%            |                                 |
|   | :           | :9.490 [K=1.0000] |                                 |
|   | :2019-12-28 | :                 |                                 |


**LED**

|   |                |               |
|---|----------------|---------------|
| : U:220.1V I:0.2231A P:47.38W PF:0.9650 |                | :5332.25x1 lm |
| : MZJ-LED140P-IP65                      | :LED 6000K     | :N/A          |
| :MZJ-LED140P-IP65                       | : 1230*82*63mm | :3            |
| :                                       | :1.084*0.082   | :N/A          |

|           | (cd/m2) |
|-----------|---------|
| L (65)av  | 19287   |
| L (75)av  | 22230   |
| L (85)av  | 42856   |
| L (65)av  | 13473   |
| L (75)av  | 11002   |
| L (85)av  | 4759    |
| L45(65)av | 16952   |
| L45(75)av | 17840   |
| L45(85)av | 27826   |

: GB/T 29293-2012

|   |             |                   |                                 |
|---|-------------|-------------------|---------------------------------|
| C | : 0 - 360   | : 0 - 180         |                                 |
| C | : 45.0      | : 0.5             |                                 |
|   | :           | :                 | (EVERFINE) GO-2000B_V1 V2.0.351 |
|   | :25.3       | :65.0%            |                                 |
|   | :           | :9.490 [K=1.0000] |                                 |
|   | :2019-12-28 | :                 |                                 |

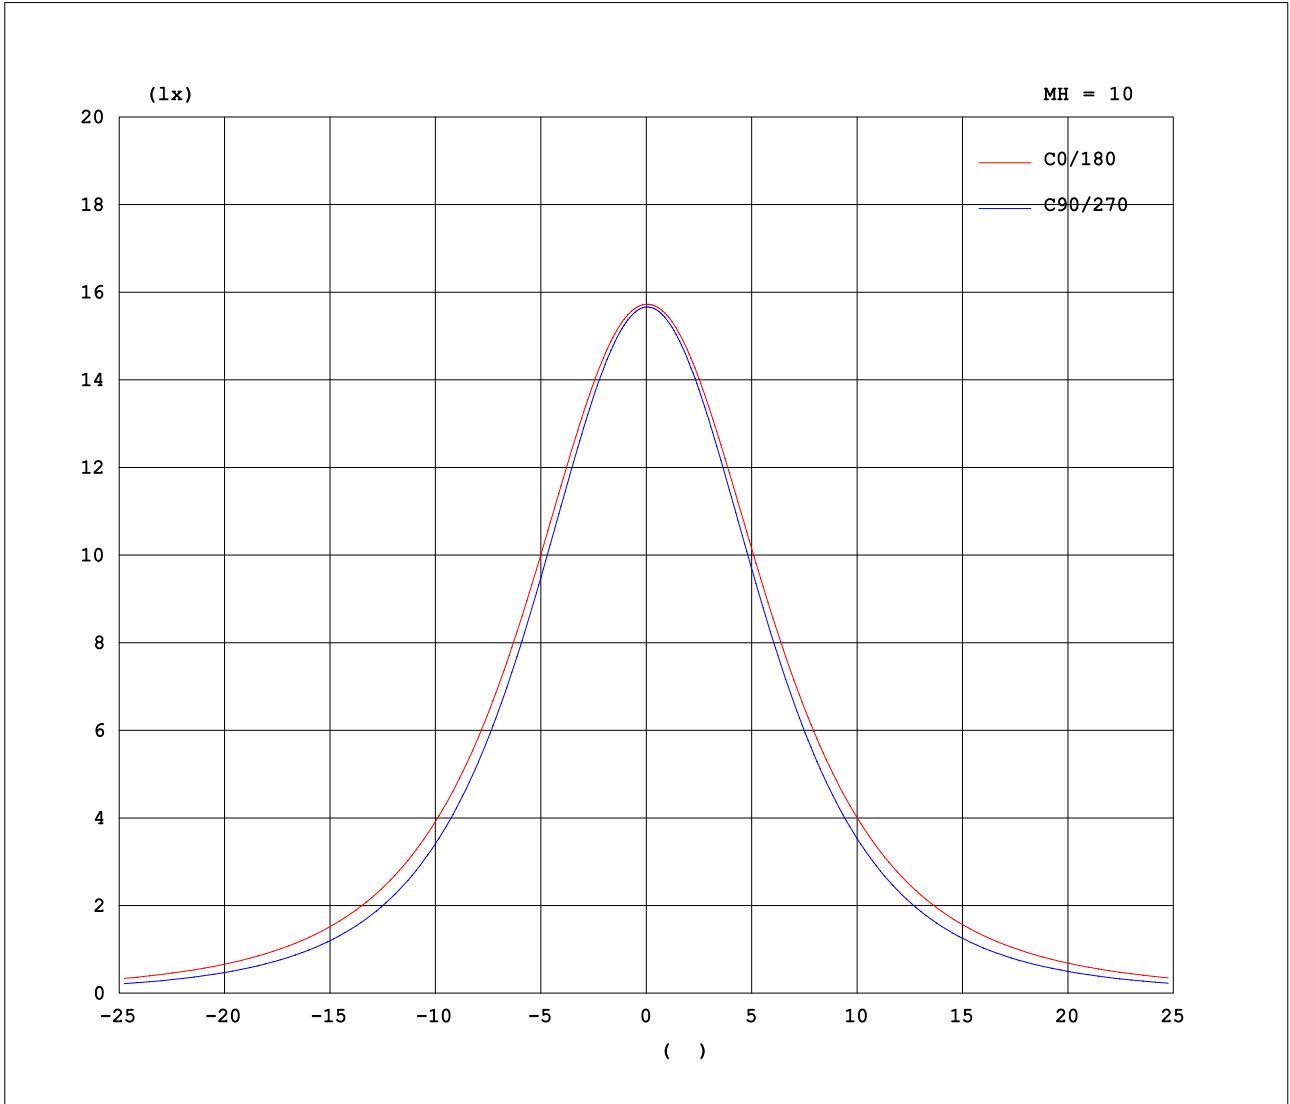

|   |   |            |       |   |       |                        |          |
|---|---|------------|-------|---|-------|------------------------|----------|
| C | : | 0          | - 360 | : | 0     | - 180                  |          |
| C | : | 45.0       |       | : | 0.5   |                        |          |
|   | : |            |       | : |       | (EVERFINE) GO-2000B_V1 | V2.0.351 |
|   | : | 25.3       |       | : | 65.0% |                        |          |
|   | : |            |       | : | 9.490 | [K=1.0000]             |          |
|   | : | 2019-12-28 |       | : |       |                        |          |

|   |                   |
|---|-------------------|
| : U:220.1V I:0.2231A P:47.38W PF:0.9650 | :5332.25x1 lm     |
| : MZJ-LED140P-IP65                      | :LED 6000K :N/A   |
| :MZJ-LED140P-IP65                       | : 1230*82*63mm :3 |
| :                                       | :1.084*0.082 :N/A |

--1

: cd

| C( DEG)<br>(DEG) | 0    | 45   | 90   | 135  | 180  | 225  | 270  | 315  |  |  |  |  |  |  |  |  |  |  |  |
|------------------|------|------|------|------|------|------|------|------|--|--|--|--|--|--|--|--|--|--|--|
| 0                | 1573 | 1569 | 1566 | 1564 | 1573 | 1569 | 1566 | 1564 |  |  |  |  |  |  |  |  |  |  |  |
| 5                | 1566 | 1561 | 1555 | 1555 | 1571 | 1565 | 1561 | 1560 |  |  |  |  |  |  |  |  |  |  |  |
| 10               | 1549 | 1540 | 1526 | 1533 | 1558 | 1546 | 1539 | 1544 |  |  |  |  |  |  |  |  |  |  |  |
| 15               | 1518 | 1506 | 1482 | 1495 | 1530 | 1513 | 1500 | 1514 |  |  |  |  |  |  |  |  |  |  |  |
| 20               | 1474 | 1458 | 1423 | 1444 | 1490 | 1466 | 1447 | 1470 |  |  |  |  |  |  |  |  |  |  |  |
| 25               | 1419 | 1397 | 1350 | 1381 | 1437 | 1405 | 1378 | 1413 |  |  |  |  |  |  |  |  |  |  |  |
| 30               | 1353 | 1326 | 1267 | 1308 | 1374 | 1334 | 1298 | 1345 |  |  |  |  |  |  |  |  |  |  |  |
| 35               | 1278 | 1246 | 1174 | 1225 | 1301 | 1252 | 1207 | 1266 |  |  |  |  |  |  |  |  |  |  |  |
| 40               | 1196 | 1157 | 1072 | 1134 | 1221 | 1162 | 1106 | 1179 |  |  |  |  |  |  |  |  |  |  |  |
| 45               | 1108 | 1062 | 965  | 1039 | 1134 | 1066 | 999  | 1085 |  |  |  |  |  |  |  |  |  |  |  |
| 50               | 1015 | 962  | 853  | 937  | 1042 | 964  | 886  | 985  |  |  |  |  |  |  |  |  |  |  |  |
| 55               | 917  | 858  | 735  | 831  | 944  | 857  | 767  | 881  |  |  |  |  |  |  |  |  |  |  |  |
| 60               | 816  | 751  | 615  | 722  | 843  | 747  | 645  | 773  |  |  |  |  |  |  |  |  |  |  |  |
| 65               | 711  | 640  | 492  | 611  | 738  | 633  | 520  | 662  |  |  |  |  |  |  |  |  |  |  |  |
| 70               | 605  | 529  | 368  | 498  | 630  | 518  | 392  | 550  |  |  |  |  |  |  |  |  |  |  |  |
| 75               | 500  | 418  | 246  | 383  | 523  | 404  | 261  | 437  |  |  |  |  |  |  |  |  |  |  |  |
| 80               | 403  | 311  | 130  | 269  | 423  | 295  | 136  | 329  |  |  |  |  |  |  |  |  |  |  |  |
| 85               | 323  | 221  | 35.4 | 188  | 341  | 217  | 38.3 | 237  |  |  |  |  |  |  |  |  |  |  |  |
| 90               | 262  | 164  | 1.16 | 151  | 279  | 166  | 1.14 | 176  |  |  |  |  |  |  |  |  |  |  |  |
| 95               | 222  | 134  | 1.49 | 139  | 237  | 141  | 1.96 | 143  |  |  |  |  |  |  |  |  |  |  |  |
| 100              | 201  | 123  | 1.95 | 129  | 213  | 129  | 2.14 | 130  |  |  |  |  |  |  |  |  |  |  |  |
| 105              | 187  | 116  | 2.34 | 118  | 195  | 118  | 2.50 | 118  |  |  |  |  |  |  |  |  |  |  |  |
| 110              | 173  | 107  | 2.85 | 108  | 179  | 109  | 2.82 | 109  |  |  |  |  |  |  |  |  |  |  |  |
| 115              | 160  | 96.5 | 3.38 | 99.1 | 164  | 100  | 3.33 | 101  |  |  |  |  |  |  |  |  |  |  |  |
| 120              | 146  | 80.7 | 3.95 | 90.1 | 149  | 91.2 | 3.85 | 87.4 |  |  |  |  |  |  |  |  |  |  |  |
| 125              | 132  | 68.1 | 4.51 | 81.1 | 131  | 82.0 | 4.40 | 72.5 |  |  |  |  |  |  |  |  |  |  |  |
| 130              | 118  | 57.7 | 5.00 | 68.9 | 114  | 73.0 | 4.91 | 62.1 |  |  |  |  |  |  |  |  |  |  |  |
| 135              | 105  | 48.4 | 5.47 | 62.8 | 99.7 | 64.2 | 5.41 | 53.0 |  |  |  |  |  |  |  |  |  |  |  |
| 140              | 91.2 | 39.6 | 5.95 | 54.6 | 84.4 | 54.5 | 5.94 | 45.3 |  |  |  |  |  |  |  |  |  |  |  |
| 145              | 77.9 | 32.5 | 6.39 | 46.4 | 72.6 | 45.9 | 6.44 | 37.6 |  |  |  |  |  |  |  |  |  |  |  |
| 150              | 64.9 | 26.9 | 6.79 | 38.2 | 62.5 | 37.5 | 6.85 | 31.0 |  |  |  |  |  |  |  |  |  |  |  |
| 155              | 51.9 | 23.1 | 7.14 | 30.1 | 50.2 | 29.7 | 7.20 | 25.0 |  |  |  |  |  |  |  |  |  |  |  |
| 160              | 39.4 | 19.7 | 7.44 | 22.6 | 39.0 | 22.0 | 7.52 | 20.9 |  |  |  |  |  |  |  |  |  |  |  |
| 165              | 28.0 | 16.4 | 7.71 | 16.0 | 27.4 | 15.4 | 7.81 | 16.7 |  |  |  |  |  |  |  |  |  |  |  |
| 170              | 17.8 | 12.6 | 7.90 | 10.7 | 16.2 | 10.5 | 8.03 | 12.7 |  |  |  |  |  |  |  |  |  |  |  |
| 175              | 8.99 | 9.43 | 8.11 | 8.07 | 9.34 | 8.12 | 8.18 | 9.55 |  |  |  |  |  |  |  |  |  |  |  |
| 180              | 7.89 | 8.04 | 8.31 | 8.07 | 7.89 | 8.00 | 8.29 | 8.07 |  |  |  |  |  |  |  |  |  |  |  |

C : 0 - 360 : 0 - 180  
 C : 45.0 : 0.5  
 : (EVERFINE) GO-2000B\_V1 V2.0.351  
 :25.3 :65.0%  
 : :9.490 [K=1.0000]  
 :2019-12-28 :